TERMOMETRI CON CASSA IN TERMOPLASTICO PER FRIGORIFERI
THERMOMETERS WITH THERMOPLASTIC CASING FOR REFRIGERATORS

PPF 40 FR

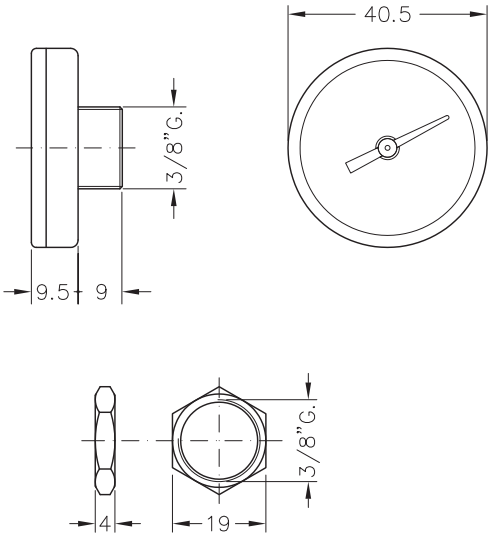

- **DESCRIZIONE**

TERMOMETRI BIMETALLICI CON GAMBO IN OTTONE FILETTATO E DADO, CASSA IN TERMOPLASTICO, VETRINO A SBALZO, PER FRIGORIFERI

- **CARATTERISTICHE DISTINTIVE**

Versione con cassa in materiale termoplastico e gambo a nottolino in ottone filettato. Di uso specifico per rilevare la temperatura in apparecchiature refrigerate. Viene normalmente fissato con l'apposito dado a un sostegno predisposto nella zona da monitorare.

- **PRINCIPALI SETTORI DI IMPIEGO**

- banchi e vetrine frigorifere
- distributori di gelati
- arredamenti e apparecchiature a temperatura controllata

- **DESCRIPTION**

BIMETALLIC THERMOMETERS WITH THREADED BRASS STEM AND NUT, THERMOPLASTIC CASING, CANTILEVERED GLASS, FOR REFRIGERATORS

- **DISTINGUISHING FEATURES**

Version with thermoplastic casing and threaded brass pawl stem. Specifically for detecting the temperature in refrigerating equipment. It is normally fixed with the appropriate nut to a support prepared in the area to be monitored.

- **MAIN FIELDS OF USE**

- refrigerated counters and displays
- ice cream dispensers
- controlled temperature furniture and equipment

- **VARIANTI E PERSONALIZZAZIONI**

La FOTO, il DISEGNO e le CARATTERISTICHE COSTRUTTIVE riportano l'aspetto, le quote e le caratteristiche del modello di produzione corrente. Siamo a disposizione dei nostri clienti per esaminare la fattibilità di ogni tipo di personalizzazione e di variante come per esempio **diametro cassa, campo scala, scale in °F, grafica, colori, dimensioni del gambo, sistemi di fissaggio, packaging speciale** e altro.

- **VARIATIONS AND CUSTOMISATIONS**

The PHOTO, DRAWING and CONSTRUCTION FEATURES show the appearance, dimensions and features of the current production model. We are available to our clients to examine the feasibility of all kinds of customisation and variation such as **case diameter, graduations, scales in °F, graphics, colours, stem sizes, fastening systems, special packaging** and more.

• RIFERIMENTI NORMATIVI*

- UNI EN 13190 classe di precisione 2
- grado di protezione IP42 secondo EN 60529

• LIMITI ALL'IMPIEGO

- temperatura sul corpo del termometro -20 ÷ +70 °C
- temperatura fluido fino al valore di fondo scala
- fluidi non corrosivi su leghe di rame, solventi compatibili con metacrilato e ABS

• CARATTERISTICHE COSTRUTTIVE

personalizzabili su specifiche esigenze del cliente

- cassa in ABS antiurto
- vetrino in metacrilato ad alta trasparenza
- gambo a nottolino in ottone filettato
- dado di fissaggio in ottone
- quadrante in alluminio preverniciato bianco, grafica blu e rossa
- campi scala di serie -40/+40 °C
- movimento: spirale bimetallica di precisione

• REFERENCE STANDARDS*

- UNI EN 13190 precision class 2
- IP42 degree of protection according to EN 60529

• LIMITATIONS OF USE

- temperature on the thermometer's body -20 ÷ +70 °C
- fluid temperature up to full scale
- non-corrosive fluids for copper alloys, solvents compatible with methacrylate and ABS

• CONSTRUCTION FEATURES

customizable according to specific customer needs

- shockproof ABS case
- highly transparent methacrylate window
- threaded brass pawl stem
- brass fixing nut
- pre-painted white aluminium dial, blue and red graphics
- standard scale range -40/+40 °C
- precision bimetallic coil movement

* per versioni di serie / for standard versions

Un vasto assortimento di termometri bimetallici è disponibile per pronta consegna dal nostro magazzino service. I codici e le caratteristiche dei termometri inclusi in tale assortimento sono consultabili nel CATALOGO LISTINO PRONTA CONSEGNA AMBIENTE SERVICE che può essere richiesto ai nostri uffici commerciali o scaricato direttamente in formato PDF dal sito www.cewal.com

A wide assortment of bimetallic thermometers is available for immediate delivery from our service warehouse. The thermometer codes and features included in this range can be consulted in the CATALOGUE PRICE LIST READY FOR DELIVERY AMBIENTE SERVICE which can be requested from our sales offices or downloaded directly from the website www.cewal.com in PDF format.